

Annex E

API Base Oil Interchangeability Guidelines for Passenger Car Engine Oils and Diesel Engine Oils

E.1 GENERAL

E.1.1 INTRODUCTION

Not all base oils have similar physical or chemical properties or provide equivalent engine oil performance in engine testing. During engine oil manufacture, marketers and blenders have legitimate needs for flexibility in base oil usage. The API Base Oil Interchangeability Guidelines (BOI) were developed to ensure that the performance of engine oil products is not adversely affected when different base oils are used interchangeably by engine oil blenders.

The API Base Oil Interchangeability Guidelines define the minimum prudent physical and engine testing necessary to ensure that engine oil performance is not adversely affected by substitution of one base oil for another. The Guidelines are based on actual engine test data, using different base oils, for both gasoline and diesel engine oil performance. The Passenger Car Motor Oil (PCMO) Guidelines were based on the use of API Service Category SG performance level additive technology and updated for SJ, SL, SM, SN and SP quality levels. The Diesel Engine Oil Guidelines were based on the use of API Service Categories CD and CD-II performance level additive technologies and updated for CE, CF, CF-2, CF-4, CG-4, CH-4, CI-4, CJ-4, CK-4, and FA-4 quality levels. At these relatively high levels of additive formulation, many of the base oil differences are “overwhelmed” by the additive performance package. For this reason, these guidelines should not be used to predict equivalent interchange at additive performance levels lower than API Service Categories SH and CD.

These Guidelines define the minimum acceptable level of testing for interchanging a base oil that every marketer must perform as a condition for obtaining a license.

It is understood that when comparing base stock properties, the precision of the methods listed in Table E-1 is taken into consideration.

Use of these Guidelines does not absolve the marketer of the responsibility for the actual performance of the licensed product sold in the aftermarket. The licensee must still ensure all of the engine and bench test results.

These Guidelines are subject to modifications based on new data, new or revised test methods, and/or new performance specifications. The current Guidelines must always be used.

E.1.2 DEFINITIONS

E.1.2.1 A *base stock* is a lubricant component that is produced by a single base stock manufacturer to the same specifications (independent of feed source or manufacturer's location); that meets the same base stock manufacturer specification; and that is identified by a unique formula, product identification number, or both. Base stocks shall be substantially free from materials introduced through manufacturing, contamination, or previous use.

E.1.2.2 A *base stock slate* is a product line of base stocks that have different viscosities but are in the same base stock group and from the same base stock manufacturer.

E.1.2.3 A *base oil* is the base stock or blend of base stocks used in a finished lubricant.

E.1.3 BASE STOCK CATEGORIES

All base stocks are divided into five general categories:

- a. Group I base stocks contain less than 90 percent saturates and/or greater than 0.03 percent sulfur and have a viscosity index greater than or equal to 80 and less than 120 using the test methods specified in Table E-1
- b. Group II base stocks contain greater than or equal to 90 percent saturates and less than or equal to 0.03 percent sulfur and have a viscosity index greater than or equal to 80 and less than 120 using the test methods specified in Table E-1.
- c. Group III base stocks contain greater than or equal to 90 percent saturates and less than or equal to 0.03 percent sulfur and have a viscosity index greater than or equal to 120 using the test methods specified in Table E-1.
- d. Group IV base stocks are polyalphaolefins (PAO). PAOs can be interchanged without additional qualification testing as long as the interchange PAO meets the original PAO manufacturer's specifications in physical and chemical properties. The following key properties need to be met in the substituted stock:
 - 1) Kinematic viscosity at 100°C, 40°C, and -40°C
 - 2) Viscosity index
 - 3) NOACK volatility
 - 4) Pour point
 - 5) Unsaturation
- e. Group V base stocks include all other base stocks not included in Group I, II, III, or IV.

Table E-1—Analytical Methods for Base Stock

Property	Test Method
Saturates ^{a, b, c} (use one listed method)	ASTM D2007 ASTM D7419
Viscosity index	ASTM D2270
Sulfur (use one listed method)	ASTM D1552 ASTM D2622 ASTM D3120 ASTM D4294 ASTM D4927

^a The most recent version of each of the listed standards shall be used.

^b For Saturates below 75.0% ASTM D2007 must be used.

^c For saturates $\geq 75.0\%$ ASTM D7419 data must be converted to the ASTM D2007 equivalent using the correlation equation outlined in ASTM D7419 to apply read across.

E.1.4 KEY ABBREVIATIONS

- **DI:** Detergent Inhibitor
- **VI:** Viscosity Index
- **VM:** Viscosity Modifier. Although viscosity modifiers are frequently referred to as Viscosity Improvers (and thus abbreviated to “VI”), this Annex will rigorously employ “VM” to avoid ambiguities vs. “Viscosity Index”.

E.2 INTERCHANGE FOR PASSENGER CAR MOTOR OILS

E.2.1 GUIDELINES

E.2.1.1 Based on existing engine test data submitted to API, passing engine tests specified in Section E.2 are required for interchanging the base stock in an original API-licensed PCMO.

E.2.1.2 In any case where base stocks of more than one group are interchanged simultaneously, the most severe testing requirement applies.

E.2.1.3 Engine testing is not required when a single interchange base stock that meets the definition of Group I, Group II, Group III, or Group IV is used at less than or equal to 10 mass percent of the blended PCMO formulation. In some cases, higher percentages of Group III or Group IV may be substituted without further engine testing as specified in this annex or in the ACC Code of Practice (Appendix I, Guideline 5). The ACC Code of Practice should be followed for Group V.

E.2.1.4 The PCMO blended with the interchange base stock shall meet all physical and chemical specifications and bench test requirements for the appropriate API Service Category and/or ILSAC specification.

E.2.1.5 Base stocks approved under the provisions of these Guidelines may be commingled without further testing, consistent with provisions of Annex F.

E.2.1.6 Acceptable test methods for base stock and base oil blend properties are listed in Table E-1. It is understood that when comparing properties, the precision of the methods is taken into consideration. In the following tables, BOV refers to the Base Oil Blend Viscosity measured by ASTM D445.

E.2.1.7 For engine oils licensed by API against the ILSAC GF-5 standard, the licensee shall ensure that the ROBO or IIIGA data supporting the final formulation was produced in a formulation containing the pour point depressant and base stock(s) used in the licensed formulation.

E.2.2 REQUIREMENTS

E.2.2.1 API recognizes the importance of the Multiple Test Evaluation Procedures. Engine testing to support base oil interchangeability shall be in accordance to the information referred to in Annex P, footnote . These Guidelines shall be used in conjunction with the ACC Code of Practice.

E.2.2.2 Complete performance documentation is required for the original Passenger Car Motor Oils (PCMO). The detergent inhibitor (DI) and/or viscosity modifier (VM) remain unchanged when interchange base oils are tested, except as provided by the ACC Code of Practice. A base oil interchange obtained under these guidelines applies to a single PCMO formulation. In the event of a change in the DI and/or VM outside the ACC Code of Practice, these Guidelines shall be reapplied.

E.2.2.3 For the passenger car tests listed in , these Guidelines may allow some testing relief. Check the Guidelines for each specific test before establishing the test program requirements for a specific oil formulation.

Table E-2—Tests for API S Category Base Oil Interchange

Test Name	ASTM	Annex E Reference	SJ	SL	SM	SN	SP	Resource Conserving	SN PLUS	GF-5	GF-6A	GF-6B
Sequence IIIE	D5533	E.2.2.4.1	X									
Sequence IIIF	D6984	E.2.2.4.1	X	X								
Sequence IIIG/IIIGA/IIIGB	D7320	E.2.2.4.1	X	X	X	X		X		X		
Sequence IIIH/IIIIHA/IIIIHB	D8111	E.2.2.4.2			X	X	X	X		X	X	X
Sequence IVA	D6891	E.2.2.4.3	X	X	X	X				X		
Sequence IVB	D8350	E.2.2.4.4					X	X			X	X
Sequence VE	D5302	E.2.2.4.5	X	X								
Sequence VG	D6593	E.2.2.4.5	X	X	X	X				X		
Sequence VH	D8256	E.2.2.4.6	X	X	X	X	X			X	X	X
Sequence VID	D7589	E.2.2.4.7						X		X		
Sequence VIE	D8114	E.2.2.4.8	X	X	X	X	X	X		X	X	
Sequence VIF	D8226	E.2.2.4.9				X	X	X				X
CRC L-38	D5119	E.2.2.4.10	X									
Sequence VIII	D6709	E.2.2.4.10	X	X	X	X	X			X	X	
Sequence IX	D8291	E.2.2.4.11					X		X		X	X
Sequence X	D8279	E.2.2.4.12					X				X	X
Ball Rust Test	D6557	E.4.2.5	X	X	X	X	X			X	X	X
EOFT	D6795	E.4.2.3	X	X	X	X	X			X	X	X
Filterability – EOWTT	D6794	E.4.2.4	X	X	X	X	X			X	X	X
Homogeneity & Miscibility	D6922	E.4.2.3	X	X	X	X	X			X	X	X
TEOST 33/33C	D6335	E.4.2.1	X			X	X	X		X	X	
TEOST MHT	D7097	E.4.2.2		X	X	X				X		
Aged Oil Low Temp. Vis. ROBO	D7528	E.2.1.7				X	X			X	X	X
Elastomer Compatibility Std. Ref. Elastomers	D7216	E.4.2.11				X	X	X		X	X	X

Note: X = Test methods where BOI is defined. Testing requirements can be found in API 1509 Annex G, Annex O and/or ASTM D4485.

E.2.2.4 Passenger car engine tests required for interchanging the base stock are given in E.2.2.4.1 through E.2.2.4.12. The BOI Guidelines vary according to the API base stock group and amount of the base stocks used in the original test oil and the candidate oil formulations. All percentages are mass percent of the total formulation unless otherwise noted.

The testing to support BOI and VGRA guideline development for each sequence test cited by the API Service Categories and ILSAC specifications utilizes base stocks, base oils, and finished fluids with a range of physical properties. The significance of the effect of these physical properties on lubricant performance can vary for each test or test type. Data for base stocks, base oils, and/or finished fluids are included in Table E-3 below. These values are provided for information only and do not represent any limitation on interpretation of these guidelines.

Table E-3—Base Stock, Base Oil, Finished Fluid Data to Support BOI/VGRA Guideline Development for Sequence Tests Cited

Sequence	Base Stock Groups	BOV ₁₀₀ Range, mm ² /s	Base Oil VI Range	Base Oil Sats Range (D7419), wt%	Base Oil Sats Range (D2007), wt%	Base Oil Sulfur Range, ppm	Viscosity Grade Range
IIIH	I, II, III ^a	4.5 to 10.7	96 to 139	96.0 to >99.8	93.1 to 98.2	<5 to 371	0W-16 to 20W-50
IVB	II, III	4.2 to 11.2	108 to 140	96.7 to >99.8	93.4 to 99.0	<5	0W-16 to 20W-50
VH	I, II, III, IV	4.2 to 11.1	95 to 130	Group I 86.8 to 87.5 Group II 95.0 to >99.8 Group III >99.8	Group I 82.8 to 83.5 Group II 92.7 to 99.0 ^b Group III 97.7 to 98.4	Group I 1301 to 1365 Groups II, III <5	0W-16 to 20W-50
VIE	II, III	4.2 to 5.9	111 to 135	96.9 to >99.8	93.6 to 99.9	<5	0W-20 to 10W-30
VIF	III	4.2 to 4.4	122 to 130	>99.8	98.3 to 99.7	<5	0W-16, 0W-20
IX	II, III, IV	4.2 to 6.2	109 to 136	96.7 to >99.8	93.4 to 99.9	<5	0W-16 to 10W-30
X	II, III, IV	4.2 to 6.2	109 to 140	96.7 to >99.8	93.4 to 98.4	<5	0W-16 to 10W-40, 5W

^a Group 1 blended with Group III at 36% Group I/64% Group III ratio.

^b Data not supplied on all Group II base stocks to enable calculation of all base oil saturates levels.

E.2.2.4.1 For Sequence IIIE, IIIF, IIIFHD, IIIG and IIIGA tests required for interchanging the base stock, specific requirements are given in Table E-4.

E.2.2.4.1.1 Single Technology Matrix (STM) is an alternate approach to BOI for Sequence IIIF, IIIFHD, IIIG, and IIIGA (see Annex O).

Additionally, once a combination of five passing Sequence IIIGB and/or Sequence IIHIB tests (Sequence IIHIB at Sequence IIIGB equivalency) has been demonstrated on a unique technology [a unique technology is a single additive package (DI) at a constant treat rate], then no additional Sequence IIIGB or Sequence IIHIB testing is required for that unique technology.

Table E-4—Sequence IIIE, IIIF, IIIFHD, IIIG, IIIGA, and IIIGB Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	≤ 30% Not Required ----- > 30% Required	≤ 30% Not Required ----- > 30% Required	Required
Group II	Required	Required	≤ 30% Not Required ----- > 30% Required	≤ 30% Not Required ----- > 30% Required	Required
Group III	Required	Required	Required	≤ 30% Not Required ----- > 30% Required	Required
Group IV	Required	Required	≤ 30% Not Required ----- > 30% Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.2.2.4.2 For Sequence IIIH and IIIHB tests required for interchanging the base stock, specific requirements are given in Table E-5.

Additionally, once five passing Sequence IIIHB tests have been demonstrated on a unique technology [a unique technology is a single additive package (DI) at a constant treat rate], then no additional Sequence IIIHB testing is required for that unique technology.

Table E-5—Sequence IIIH and IIIHB Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	≤ 30% Not Required ----- > 30% Required	Required	Required
Group II	Required	Required	≤ 30% Not Required ----- > 30% Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided interchange Group IV meets original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.2.2.4.3 For Sequence IVA tests required for interchanging the base stock, specific requirements are given in Table E-6.

Table E-6—Sequence IVA Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if BOV @ 100°C ≥ original	Not Required if BOV @ 100°C ≥ original	≤30% Not Required ----- > 30% Not Required if BOV @ 100°C ≥ original	≤30% Not Required ----- > 30% and ≤ 50% Not Required if BOV @ 100°C ≥ original ----- > 50% Required	Required
Group II	Not Required if BOV @ 100°C ≥ original	Not Required if BOV @ 100°C ≥ original	≤30% Not Required ----- > 30% Not Required if BOV @ 100°C ≥ original	≤30% Not Required ----- > 30% and ≤ 50% Not Required if BOV @ 100°C ≥ original ----- > 50% Required	Required
Group III	Not Required if BOV @ 100°C ≥ original	Not Required if BOV @ 100°C ≥ original	Not Required if BOV @ 100°C ≥ original	≤ 30% Not Required if BOV @ 100°C ≥ original ----- > 30% Required	Required
Group IV	Required	Required	≤ 30% Not Required ----- > 30% Required	Not Required provided the interchange Group IV meets original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

Note: BOV refers to the base oil blend viscosity measured by ASTM D445.

E.2.2.4.4 For Sequence IVB tests required for interchanging the base stock, specific requirements are given in Table E-7.

Table E-7—Sequence IVB Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required if base oil viscosity @ 100°C ≥ original	Not Required if base oil viscosity @ 100°C ≥ original	Required	Required
Group III	Required	Not Required if base oil viscosity @ 100°C ≥ original	Not Required if base oil viscosity @ 100°C ≥ original	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

Note: The guidelines in this table were developed from data generated on oil with viscosity grades from SAE 0W-16 to SAE 20W-50. These do not restrict application of the guidelines by the marketer that is responsible for ensuring that each licensed engine oil satisfies all engine and bench test performance requirements.

E.2.2.4.5 For Sequence VE/VG tests required for interchanging the base stock, specific requirements are given in Table E-8.

Table E-8—Sequence VE/VG Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur ≤ and saturates ≥ original	Not Required	Not Required	≤50% Not Required ----- > 50% Required	Required
Group II	Required	Not Required if saturates ≥ original	Not Required	≤50% Not Required ----- > 50% Required	Required
Group III	Required	Required	Not Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.2.2.4.6 For Sequence VH tests required for interchanging the base stock, specific requirements are given in Table E-9.

Table E-9—Sequence VH Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if base oil viscosity at 100°C ≥ original and both original and candidate base oil saturates by ASTM D2007 ≥ 83% and sulfur ≤ 0.13% ----- Not Required if base oil viscosity at 100°C ≥ original when original base oil saturates by ASTM D2007 < 83% or sulfur > 0.13% and candidate oil saturates ≥ original and candidate oil sulfur ≤ original	Not Required if base oil viscosity at 100°C ≥ original	Not Required if base oil viscosity at 100°C ≥ original	Required	Required
Group II	Not Required if base oil viscosity at 100°C ≥ original and candidate base oil saturates by ASTM D2007 ≥ 83% and sulfur ≤ 0.13%	Not Required if base oil viscosity at 100°C ≥ original	Not Required if base oil viscosity at 100°C ≥ original	Required	Required
Group III	Not Required if base oil viscosity at 100°C ≥ original and candidate base oil saturates by ASTM D2007 ≥ 83% and sulfur ≤ 0.13%	Not Required if base oil viscosity at 100°C ≥ original	Not Required if base oil viscosity at 100°C ≥ original	Required	Required
Group IV	Required	< 50% Not Required if base oil viscosity at 100°C ≥ original ----- ≥ 50% Required	< 50% Not Required if base oil viscosity at 100°C ≥ original ----- ≥ 50% Required	Not Required provided the interchange Group IV meets original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.2.2.4.7 For Sequence VID tests required for interchanging the base stock, specific requirements are given in Table E-10.

Table E-10—Sequence VID Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required if HTHS@100°C (D6616) ≤ original. If HTHS@100°C > the original, see equations for Table E-9		Required	Required
Group III	Required			Required	Required
Group IV	Required	Required	Required	Not Required provided interchange Group IV meets original manufacturer's specification in all physical and chemical properties E.1.3.d	Required
Group V	Required	Required	Required	Required	Required

Equations for Table E-10

If the HTHS@100°C of the candidate oil is > the HTHS@100°C of the original passing oil, testing is not required if both equations are true:

$$H_{\text{Candidate}} \leq H_{\text{Original}} + \{(FEI_{\text{sumLimit}} - FEI_{\text{sumOriginal}}) / -0.485\} + (H_{\text{Original}} * R)$$

$$H_{\text{Candidate}} \leq H_{\text{Original}} + \{(FEI2_{\text{Limit}} - FEI2_{\text{Original}}) / -0.227\} + (H_{\text{Original}} * R)$$

Where:

$H_{\text{Candidate}}$ is the HTHS@100°C of the candidate oil as measured by ASTM D6616

H_{Original} is the HTHS@100°C of the original tested oil as measured by ASTM D6616

FEI_{sumLimit} is the FEI sum passing limit for the original tested viscosity grade

$FEI_{\text{sumOriginal}}$ is the FEI sum ($FEI1_{\text{Original}} + FEI2_{\text{Original}}$) result of the original tested oil

-0.485 is the FEI sum coefficient from the Seq. VID industry matrix model

$FEI2_{\text{Limit}}$ is the FEI2 passing limit for the original tested viscosity grade

$FEI2_{\text{Original}}$ is the FEI2 result of the original tested oil

-0.227 is the FEI2 coefficient from the Sequence VID industry matrix model

R is the reproducibility as reported in the most recent version of ASTM D6616

Note:

$R = 0.035$ (3.5%) for ASTM D6616-07

The range of HTHS@100°C used to develop the Sequence VID industry matrix model was 5.44 to 7.68 cP.

E.2.2.4.8 For Sequence VIE tests required for interchanging the base stock, specific requirements are given in Table E-11.

Table E-11—Sequence VIE Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required if HTHS@150°C ≤ original. If HTHS@150°C > original, see equation below	Not Required if HTHS@150°C ≤ original. If HTHS@150°C > original, see equation below	Required	Required
Group III	Required	Not Required if HTHS@150°C ≤ original. If HTHS@150°C > original, see equation below	Not Required if HTHS@150°C ≤ original. If HTHS@150°C > original, see equation below	Required	Required
Group IV	Required	Required	Required	Not Required provided interchange Group IV meets original manufacturer's specification in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

Equation for Table E-11

If the HTHS@150°C of the candidate oil is > the HTHS@150°C of the original passing oil, testing is not required if both equations are true:

$$H_{\text{Candidate}} \leq H_{\text{Original}} + \{(FEI_{\text{sumLimit}} - FEI_{\text{sumOriginal}}) / -0.733\} + R$$

$$H_{\text{Candidate}} \leq H_{\text{Original}} + \{(FEI2_{\text{Limit}} - FEI2_{\text{Original}}) / -0.246\} + R$$

Where:

$H_{\text{Candidate}}$ is the HTHS@150°C of the candidate oil as measured by ASTM D4683

H_{Original} is the HTHS@150°C of the original tested oil as measured by ASTM D4683

FEI_{sumLimit} is the FEI sum passing limit for the original tested viscosity grade

$FEI_{\text{sumOriginal}}$ is the FEI sum ($FEI1_{\text{Original}} + FEI2_{\text{Original}}$) result of the original tested oil

$FEI2_{\text{Limit}}$ is the FEI2 passing limit for the original tested viscosity grade

$FEI2_{\text{Original}}$ is the FEI2 result of the original tested oil

R is the reproducibility as reported in the most recent version of ASTM D4683; the current

$R = 0.03207 \times H_{\text{Original}} + 0.0389$ for ASTM D4683-17

-0.733 and -0.246 are coefficients from the Sequence VIE industry matrix model

E.2.2.4.9 For Sequence VIF tests required for interchanging the base stock, specific requirements are given in Table E-12.

Table E-12—Sequence VIF Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Required	Required	Not Required	Required
Group III	Required	Required	Not Required if base oil VI of candidate oil \geq original test oil	Not Required	Required
Group IV	Required	Required	Required	Not Required provided interchange Group IV meets original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.2.2.4.10 For CRC L-38/Sequence VIII tests required for interchanging the base stock, specific requirements are given in Table E-13.

Note: These BOI Guidelines apply only to bearing weight loss.

Table E-13—CRC L-38/Sequence VIII Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	Not Required	Not Required	Required
Group II	Not Required	Not Required	Not Required	Not Required	Required
Group III	Not Required	Not Required	Not Required	$\leq 30\%$ Not Required ----- $> 30\%$ Required	Required
Group IV	Required	Required	$\leq 30\%$ Not Required ----- $> 30\%$ Required	Not Required provided interchange Group IV meets original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

Data to support stay-in-grade performance shall be maintained by the licensee for active API Service Categories and ILSAC specifications. Either CRC L-38/Sequence VIII or ASTM D6278 (30 passes) may be used to support stay-in-grade requirements where the limits are listed in Table E-14.

Table E-14—CRC L-38/Sequence VIII Tests Stay-in-Grade Requirements

Viscosity Grade	L-38/Sequence VIII 10 hr Stripped Kinematic Viscosity@100°C (mm ² /s), min	ASTM D6278 (30 Passes) Kinematic Viscosity@100°C (mm ² /s), min
XW-16	6.1	5.8
XW-20	6.9	6.5
XW-30	9.3	8.5
XW-40	12.5	11.5
XW-50	16.3	15.0
XW-60	21.9	19.8

E.2.2.4.11 For Sequence IX tests required for interchanging the base stock, specific requirements are given in Table E-15.

Table E-15—Sequence IX Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required	Not Required	Not Required	Required
Group III	Required	Not Required	Not Required	Not Required	Required
Group IV	Required	Not Required	Not Required	Not Required	Required
Group V	Required	Required	Required	Required	Required

Note: The guidelines in this table were developed from data generated on oil with viscosity grades from SAE 0W-16 to SAE 10W-30. These viscosity grades do not restrict application of the guidelines by the marketer that is responsible for ensuring that each licensed engine oil satisfies all engine and bench test performance requirements.

E.2.2.4.12 For Sequence X tests required for interchanging the base stock, specific requirements are given in Table E-16.

Table E-16—Sequence X Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required	Not Required	Not Required	Required
Group III	Required	Not Required	Not Required	Not Required	Required
Group IV	Required	Not Required	Not Required	Not Required	Required
Group V	Required	Required	Required	Required	Required

Note: The guidelines in this table were developed from data generated on oil with viscosity grades from SAE 0W-16 to SAE 10W-40. These viscosity grades do not restrict application of the guidelines by the marketer that is responsible for ensuring that each licensed engine oil satisfies all engine and bench test performance requirements.

E.2.3 EXAMPLES

E.2.3.1 General

The API Base Oil Interchangeability Guidelines must be used in conjunction with the API Guidelines for SAE Viscosity-Grade Engine Testing (see Annex F). When the original approved grade contains less than or equal to 10 mass percent of the interchange base stock, the higher grade must be tested if it contains greater than 10 percent of the interchange base stock in the formulation.

E.2.3.2 Example 1

In this example, a marketer wants to replace the Group I, 200N base stock in the marketer's SAE 5W-30 and 10W-30 grades with a new Group I, 200N base stock from another manufacturer. The SAE 5W-30 grade is a fully approved API SJ product made with a Group I base oil mix of 10 percent or less 200N and 90 percent or more 100N. The SAE 10W-30 grade is an approved API SJ product by viscosity grade read-across made with a Group I base oil mix of 65 percent 200N and 35 percent 100N. Both grades use the same Group I base stock slate.

The marketer needs to take the following steps:

- Check the API Guidelines for SAE Viscosity-Grade Engine Testing. An SAE 5W-30 grade may be read across to an SAE 10W-30 grade when the same base stock slate is used in both grades.
- Check the API Base Oil Interchangeability Guidelines. Since the SAE 5W-30 product contains less than or equal to 10 percent 200N base stock in the base oil and the interchange base stock is from the same group, no engine testing is required for the interchange. However, testing is required on the SAE 10W-30 product (the higher viscosity grade with a higher level of 200N). According to the API Base Oil Interchangeability Guidelines, the marketer must obtain a passing Sequence IIIE to interchange one Group I, 200N base stock

with another. The marketer may also need to obtain a passing Sequence VE if the requirements of Table E-5 are not met.

E.2.3.3 Example 2

In this example, a marketer wants to replace the Group I, 100N and 200N base stocks in its approved SAE 5W-30 and 10W-30 grades with Group I 100N and 200N base stocks from another source. The SAE 5W-30 grade is a fully approved API SJ product made with a Group I base oil mix of 10 percent or less 200N and 90 percent or more 100N. The SAE 10W-30 grade is an approved API SJ product by viscosity read-across made with a Group I base oil mix of 65 percent 200N and 35 percent 100N. Both grades use the same base stock slate.

The marketer needs to take the following steps:

- a. Check the API Guidelines for SAE Viscosity-Grade Engine Testing. As in the previous example, an SAE 5W-30 grade may be read across to an SAE 10W-30 grade when the same base stock slate is used.
- b. Check the API Base Oil Interchangeability Guidelines. If the marketer viewed the grades independently, the SAE 5W-30 product would require testing because of the level of 100N base oil, and the 10W-30 product would require testing because of the level of 200N. However, because the API Guidelines for SAE Viscosity-Grade Engine Testing permit read across from the tested SAE 5W-30 grade to the SAE 10W-30 grade when the same base stock slate is used in both grades, only the SAE 5W-30 grade would need to be tested. As in Example 1, the marketer must run a Sequence IIIE and may have to run a Sequence VE in the new base stocks.

E.2.3.4 Example 3

In this example, a marketer wants to interchange the source (brand) of Group I bright stock in an SAE 30 grade. This interchange involves a fully approved API SJ SAE 5W-30 grade made with a Group I base oil mix of 90 percent 100N and 10 percent 200N. The SAE 30 grade is a fully approved API SJ product by viscosity read-across made with a Group I base oil mix of 90 percent 200N and 10 percent bright stock. Both grades use the same base stock slate.

The marketer needs to take the following steps:

- a. Check the API Guidelines for SAE Viscosity-Grade Engine Testing. An SAE 5W-30 API SJ product may be read across to an SAE 30 grade if the same base stock slate is used.
- b. Check the API Base Oil Interchangeability Guidelines. Base stock slate sources at 10 percent or less of the formulation may be interchanged with other base stock sources without further testing.

E.2.3.5 Example 4

In this example, a marketer wants to interchange the source (brand) of Group I bright stock in an SAE 30 grade. The SAE 30 grade is a fully approved API SJ product by viscosity read-across from an SAE 5W-30 grade. The SAE 30 contains 15 percent bright stock in the finished formulation. Both grades use the same base stock slate.

The marketer needs to check the API Base Oil Interchangeability Guidelines. Since the bright stock is present at greater than 10 percent, the Sequence IIIE and possibly the Sequence VE must be run in the SAE 30 grade with the new bright stock.

E.2.3.6 Example 5

In this example, a marketer wants to interchange the source (brand) of Group II, 200N base stock used in a fully approved API SJ SAE 10W-30 grade. The product is made with a Group II base oil mix of 80 percent 100N and 20 percent 200N. The base oil mix meets the Group II requirements of less than or equal to 0.03 percent sulfur and greater than or equal to 90 percent saturates.

The marketer needs to check the API Base Oil Interchangeability Guidelines. The 200N oil is present at greater than 10 percent in the original formulation, so testing is required. To make the interchange, the marketer must run a Sequence IIIE and may have to run a VE.

E.2.3.7 Example 6

In this example, a marketer wants to make an SAE 40 grade from the same base stock slate used in a fully approved API SJ SAE 5W-30 grade. The SAE 5W-30 grade is made with a Group I base oil mix of 90 percent 100N and 10 percent 200N and is formulated with a nondispersant viscosity modifier. The SAE 40 grade contains 80 percent 300N and 20 percent bright stock in the base oil.

The marketer needs to take the following steps:

- a. Check the API Guidelines for SAE Viscosity-Grade Engine Testing. A non-Energy Conserving API SJ SAE 5W-30 product may be read across to an SAE 40 grade without further testing (note that if the SAE 5W-30 were formulated with a dispersant viscosity modifier, a Sequence VE test would be required).
- b. Check the API Base Oil Interchangeability Guidelines. Since the SAE 40 grade has the same source (brand) base oils, no interchange is taking place. No further testing is required.

E.2.3.8 Example 7

In this example, a marketer wants to exchange the Group II, 100N base stock in the base oil mix of a fully approved API SL SAE 5W-30 grade for a Group I, 100N base stock. The SAE 5W-30 grade is made with a base oil mix of 50 percent Group II, 100N, and 50 percent Group I, 150N.

The marketer needs to check the API Base Oil Interchangeability Guidelines. To exchange a Group II for a Group I oil, the marketer needs to run the Sequence VG, IIIF (or Sequence IIIG per ASTM D 4485) and IVA tests and, if Energy Conserving is desired for API Service Category SL, the Sequence VIB test. Check Table E-6 to see if read-across is allowed.

Note: If both the 100N and 150N base stocks were interchanged for new Group I base stocks, the most severe testing requirements [namely, Sequence VG, IIIF (or Sequence IIIG per ASTM D4485) and IVA tests and, if Energy Conserving is desired for API Service Category SL, the Sequence VIB test) would apply.

E.2.3.9 Example 8

In this example, a marketer wants to change from a full Group IV and Group V slate of base stocks to a partly Group IV (PAO) slate for a PCMO. The marketer has two products involved in this interchange: a fully approved API SL SAE 10W-30 grade with a Group IV and Group V base oil mix (Group IV/V) that contains PAO and ester fluids and a fully approved SAE 10W-30 grade with a Group I base oil mix that contains 60 percent 100N and 40 percent 250N. Both oils contain the same DI additive treat and VM.

The marketer needs to check the API Base Oil Interchangeability Guidelines. Exchange between a full Group IV/V and Group I requires full approval testing. This has been done for the Group I and the Group IV/V products. Since both the Group I stocks and the full Group IV/V blend are approved, mixtures of the two can be used without further testing.

E.2.3.10 Example 9

In this example, a marketer wants to change one PAO (Group IV) in a PAO-plus-ester SAE 5W-30 grade. The fully-approved API SL/Energy Conserving/ILSAC GF-3 SAE 5W-30 grade is made with a mix of Group IV and Group V base oils consisting of 4-centistoke PAO and ester fluids.

No testing is required for the substitute 4-centistoke PAO, provided it meets the same physical and chemical specifications as the original 4-centistoke PAO.

E.2.3.11 Example 10

In this example, a marketer wants to add 15 percent more Group IV base stock to a licensed API SJ SAE multi-viscosity grade made with a mix of 15 percent Group IV base stock, 65 percent Group II base stock, and 20 percent DI/VM additive treat. The new formulation contains 30 percent Group IV base stock, 50 percent Group II base stock, and 20 percent DI/VM additive treat.

No engine testing (except for the Sequence VIA if the oil is energy conserving) is required for the new formulation since the BOI tables allow up to 30 percent maximum of Group IV base stock in the finished oil formulation without further testing.

E.2.3.12 Example 11

In this example, a marketer wants to add 30 percent more Group IV base stock to a licensed API SL/Energy Conserving SAE multi-viscosity grade made with a mix of 20 percent Group IV base stock, 60 percent Group II base stock, and 20 percent DI/VM additive treat. The new formulation contains 50 percent Group IV base stock, 30 percent Group II base stock, and 20 percent DI/VM additive treat.

According to the tables, Sequence IIIF and VIB engine testing is required when the total Group IV content is increased to 50 percent. If the total Group IV content were increased to above 50 percent, complete engine testing except for the Sequence VIII would be required for the new formulation.

E.2.3.13 Example 12

In this example, a marketer wants to know how much more Group IV base stock can be added to an API SJ- or SL-licensed SAE multi-viscosity grade made with a mix of 24 percent Group IV base stock, 56 percent Group II base stock, and 20 percent DI/VM additive treat without further engine testing.

Since the tables allow up to 30 percent maximum of Group IV base stock in the finished oil formulation without further testing when interchanging Group II with Group IV, the marketer could add 6 percent more Group IV base stock without further engine testing. The new formulation would contain 30 percent Group IV base stock, 50 percent Group II base stock, and 20 percent DI/VM additive treat.

E.2.3.14 Example 13

For Sequence VID BOI (Table and Equation) the following example is applicable:

A passing oil using any combination of API Group II and/or III base stocks is being read to a candidate formulation of equivalent or lower HTHS using different API Group II or III base stocks.

A candidate oil using the same technology (Performance Package and Viscosity Modifier) is formulated to the same viscosity grade using different Group II or Group III base stocks. The candidate oil has an HTHS @100°C of 6.44 cP.

The Base Oil Interchange is allowed to the candidate oil because the HTHS@100°C value of the candidate oil is less than the original tested oil and the base stocks involved are combinations of Group II and Group III.

E.2.3.15 Example 14

For Sequence VID BOI (Table and Equation) the following example is applicable:

A passing oil using any combination of API Group II and/or III base stocks is being read to a candidate formulation of higher HTHS using different API Group II, III base stocks.

The original formulated oil using a Group II or Group III base stock(s) (or mixture) is run in the Sequence VID and achieves a passing FEI_{sum} and FEI_2 . The oil has an HTHS @100°C of 6.52 cP. The passing result is 0.40 above the passing specification for FEI_{sum} (i.e. $FEI_{sumLimit} - FEI_{sumOriginal} = -0.40$) and 0.16 above the passing specification for FEI_2 . (i.e. $FEI_{2Limit} - FEI_{2Original} = -0.16$)

A candidate oil using the same technology (Performance Package and Viscosity Modifier) is formulated to the same viscosity grade using different Group II or Group III base stocks. The candidate oil has an HTHS @100°C of 7.40 cP. The reproducibility (R) for D6616-07 is 0.035 (3.5%).

The allowable Base Oil Interchange is assessed using Equations E 1.0 as follows:

$$A = FEI_{sum} \text{ HTHS} = 6.52 + (-0.40/-0.485) + 6.52 \times 0.035 = 7.57 \text{ cP}$$

$$B = FEI2 \text{ HTHS} = 6.52 + (-0.16/-0.227) + 6.52 \times 0.035 = 7.45 \text{ cP}$$

The Base Oil Interchange is limited by the lesser of A and B which is 7.45 cP. The candidate oil HTHS@100 °C is 7.40 and is less than 7.45. Therefore, the Base Oil Interchange is allowed.

No further allowance for precision of HTHS measurement is permitted.

E.2.3.16 Example 15

For Sequence VID BOI (Table and Equation) the following example is applicable:

A passing oil using any combination of API Group II and/or III base stocks is being read to a candidate formulation of higher HTHS using different API Group II, III base stocks.

The original formulated oil using a Group II or Group III base stock(s) (or mixture) is run in the Sequence VID and achieves a passing FEI_{sum} and $FEI2$. The oil has an HTHS @100°C of 6.52 cP. The passing result is within the lower rounding of passing specification, i.e. -0.04 below the passing specification for FEI_{sum} (i.e. $FEI_{sumLimit} - FEI_{sumOriginal} = +0.04$) and 0.10 above the passing specification for $FEI2$. (i.e. $FEI2_{Limit} - FEI2_{Original} = -0.10$)

A candidate oil using the same technology (Performance Package and Viscosity Modifier) is formulated to the same viscosity grade using different Group II or Group III base stocks. The candidate oil has an HTHS @100°C of 7.02 cP. The reproducibility (R) for D6616-07 is 0.035 (3.5%).

The allowable Base Oil Interchange is assessed using Equations E 1.0 as follows:

$$A = FEI_{sum} \text{ HTHS} = 6.52 + (+0.04/-0.485) + 6.52 \times 0.035 = 6.67 \text{ cP}$$

$$B = FEI2 \text{ HTHS} = 6.52 + (-0.10/-0.227) + 6.52 \times 0.035 = 7.19 \text{ cP}$$

The Base Oil Interchange is limited to the lesser of A or B, which is an HTHS @100°C of 6.67 Cp. The candidate oil HTHS is 7.02 cP and is greater than 6.67 cP so the Base Oil Interchange is NOT allowed.

No further allowance for precision of HTHS measurement is permitted.

E.2.3.17 Additional Examples

Additional examples on applying Base Oil Interchangeability Guidelines may be noted in Annex M.

E.3 INTERCHANGE FOR HEAVY DUTY ENGINE OILS

E.3.1 GUIDELINES

E.3.1.1 Based on existing engine test data submitted to API, passing engine tests specified in Section E.3 are required for interchanging the base stock in an original API-licensed Heavy Duty Engine Oil (HDEO).

E.3.1.2 In any case where base stocks of more than one group are interchanged simultaneously, the most severe testing requirement applies.

E.3.1.3 Engine testing is not required when a single interchange base stock that meets the definition of Group I, Group II, Group III, or Group IV is used at less than or equal to 10 mass percent of the blended HDEO formulation. In some cases, higher percentages of Group III or Group IV may be substituted without further engine testing as specified in this annex or in the ACC Code of Practice (Appendix I, Guideline 5). The ACC Code of Practice should be followed for Group V.

E.3.1.4 The heavy duty engine oil blended with the interchange base oil shall meet all physical and chemical specifications required for the appropriate API Service Category.

E.3.1.5 Base stocks approved under the provisions of these Guidelines may be commingled without further testing, consistent with Annex F.

E.3.1.6 Acceptable test methods for base stock and base oil blend properties are listed in Table E-1. It is understood that when comparing properties, the precision of the methods is taken into consideration. In the following tables, BOV refers to the Base Oil Blend Viscosity measured by ASTM D445.

E.3.2 REQUIREMENTS

E.3.2.1 API recognizes the importance of the Multiple Test Evaluation Procedures. Engine testing to support base oil interchangeability shall be in accordance with the information referred to in Annex K. These Guidelines shall be used in conjunction with the ACC Code of Practice.

E.3.2.2 Complete performance documentation is required for the original HDEOs. The detergent inhibitor (DI) and/or viscosity modifier (VM) remain unchanged when interchange base oils are tested, except as provided by the ACC Code of Practice. A base oil interchange obtained under these guidelines applies to a single HDEO formulation. In the event of a change in the DI and/or VM outside the ACC Code of Practice, these Guidelines shall be reapplied.

E.3.2.3 When a base stock or slate of base stocks is to be changed in a number of different viscosity grades containing a single Heavy Duty engine oil formulation, these Guidelines shall be used in conjunction with Annex F, except when the recommended grade for testing contains less than or equal to 10 mass percent of the interchange base stock in the formulation. In this case, the next higher viscosity grade shall be tested.

E.3.2.4 For HDEO tests listed in Table E-17, the BOI Guidelines may allow for some testing relief. Check Guidelines for each specific test before establishing the test program requirements for a specific oil formulation.

Table E-17—Tests for API C and F Category Base Oil Interchange

Test Name	ASTM	Annex E Reference	CH-4	CI-4	CI-4 w/CI-4 PLUS	CJ-4	CK-4/FA-4
Sequence IIIF/IIIFHD	D6984	E.2.2.4.1	X	X	X	X	
Sequence IIIG	D7320	E.2.2.4.1	X	X	X	X	
Caterpillar 1K	D6750 (1K)	E.3.2.5.1	X	X	X		
Caterpillar 1N	D6750 (1N)	E.3.2.5.2		X	X	X	X
Caterpillar 1P	D6681	E.3.2.5.4	X	X	X		
Caterpillar 1R	D6923	E.3.2.5.3		X	X		
Caterpillar Oil Aeration Test	D8047	E.3.2.5.16					X
Engine Oil Aeration Test	D6894	E.3.2.5.9	X	X	X	X	
Cummins ISM	D7468	E.3.2.5.11		X	X	X	X
Cummins ISB	D7484	E.3.2.5.11				X	X
Cummins M11	D6838	E.3.2.5.10	X				
Cummins M11 EGR	D6975	E.3.2.5.10		X	X		
Mack T-8	D5967	E.3.2.5.6					
Mack T-8E	D5967	E.3.2.5.6	X	X	X		
Mack T-9	D6483	E.3.2.5.5	X				
Mack T-10	D6987/ D6987M	E.3.2.5.7	X	X	X		
Mack T-10A	75 hr. used oil in D4684	E.4.2.6		X	X		
Mack T-11	D7156	E.3.2.5.13			X	X	X
Mack T-11A	D6896	E.4.2.8			X	X	X
Mack T-12	D7422	E.3.2.5.12		X	X	X	X
Volvo T-13	D8048	E.3.2.5.15					X
Roller Follower Wear Test	D5966	E.3.2.5.8	X	X	X	X	X
Cummins HTCBT	D6594	E.4.2.9	X	X	X	X	X
Elastomer Compatibility (HD)	D7216	E.4.2.7		X	X		

E.3.2.5 Heavy duty engine tests required for interchanging the base stock are given in E.3.2.5.1 through E.3.2.5.16. The BOI guidelines vary according to the API base stock group and amount of the base stocks used in the original test oil and the candidate oil formulations. All percentages are mass percent of the total formulation unless otherwise noted.

The testing to support BOI and VGRA guideline development for each heavy duty engine test included in the API Service Categories utilizes base stocks, base oils, and finished fluids with a range of physical properties. The significance of the effect of these physical properties on lubricant performance can vary for each test or test type. Data for base stocks, base oils, and/or finished fluids are included in Table E-18 below. These values are provided for information only and do not represent any limitation on interpretation of these guidelines.

Table E-18—Base Stock, Base Oil, Finished Fluid Data to Support BOI/VGRA Guideline Development for Heavy Duty Engine Tests Included in API Service Categories

Engine Test	Base Stock Groups	BOV ₁₀₀ Range, mm ² /s	Base Oil VI Range	Base Oil Sats Range (D7419), wt%	Base Oil Sats Range (D2007), wt%	Viscosity Grade Range
T-13	II	5.6 to 7.1	108 to 118	97.4 to >99.8	94.7 to 98.3	10W-30 ^a , 10W-40, 15W-40
COAT	II	5.5 to 7.3	108 to 115	97.4 to >99.8	94.7 to 98.0	10W-30, 10W-40, 15W-40 ^a

^a Viscosity grade used for BOI guideline development.

E.3.2.5.1 For Caterpillar 1K tests required for interchanging the base stock, specific requirements are given in Table E-19.

Table E-19—Caterpillar 1K Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	≤30% Not Required ----- >30% Required	≤30% Not Required ----- >30% Required	Required
Group II	Not Required	Not Required	≤30% Not Required ----- >30% Required	≤30% Not Required ----- >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.2 For Caterpillar 1N tests required for interchanging the base stock, specific requirements are given in Table E-20.

Table E-20—Caterpillar 1K Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	Required	Required	Required
Group II	Not Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.3 For Caterpillar 1R tests required for interchanging the base stock, specific requirements are given in Table E-21.

Table E-21—Caterpillar 1R Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	Required	Required	Required
Group II	Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.4 For Caterpillar 1P tests required for interchanging the base stock, specific requirements are given in Table E-22

Table E-22—Caterpillar 1P Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Required in only one Group II base stock for CH-4/Not Required for CI-4	Required	Required	Required
Group II	Not Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.5 For Mack T-9 tests required for interchanging the base stock, specific requirements are given in Table E-23.

Table E-23—Mack T-9 Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur \leq and saturates \geq original	Not Required	$\leq 30\%$ Not Required ----- >30% Required	$\leq 30\%$ Not Required ----- >30% Required	Required
Group II	Required	Not Required if saturates \geq original	$\leq 30\%$ Not Required ----- >30% Required	$\leq 30\%$ Not Required ----- >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.6 For Mack T-8 and T-8E tests required for interchanging the base stock, specific requirements are given in Table E-24.

Table E-24—Mack T-8/T-8E Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if either of the following is met: 1. Saturates of original oil is $\geq 80\%$ and interchange base oil saturates is \geq the original oil 2. Saturates of original oil is <80% and interchange base oil saturates is \geq the original oil saturates at the 95% confidence level (see example in E.3.3.5)	Not Required	Not Required	Not Required	Required
Group II	Required	Not Required if saturates is \geq the original oil	Not Required	Not Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.7 For Mack T-10 tests required for interchanging the base stock, specific requirements are given in Table E-25 for Interchanging the Base Stock

Table E-25—Mack T-10 Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if: saturates \geq original AND sulfur \leq original AND BOV at 100°C \geq BOV at 100°C of original	Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original	$\leq 30\%$ Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original ----- >30% Required	$\leq 30\%$ Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original ----- >30% Required	Required
Group II	Required	Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original	$\leq 30\%$ Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original ----- >30% Required	$\leq 30\%$ Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original ----- >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.8 For Roller Follower Wear Test (RFWT) tests required for interchanging the base stock, specific requirements are given in Table E-26.

Table E-26—RFWTs Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	$\leq 30\%$ Not Required ----- >30% Required	$\leq 30\%$ Not Required ----- >30% Required	Required
Group II	Required in only one Group I base stock	Not Required	$\leq 30\%$ Not Required ----- >30% Required	$\leq 30\%$ Not Required ----- >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.9 For Engine Oil Aeration Tests (EOAT) required for interchanging the base stock, specific requirements are given in Table E-27.

Table E-27—EOATs Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	≤30% Not Required ----- >30% Required	≤30% Not Required ----- >30% Required	Required
Group II	Not Required	Not Required	≤30% Not Required ----- >30% Required	≤30% Not Required ----- >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.10 For Cummins M11 and M11 EGR tests required for interchanging the base stock, specific requirements are given in Table E-28.

Table E-28—Cummins M11/M11 EGR Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if: saturates ≥ original AND sulfur ≤ original	Not Required	≤30% Not Required ----- >30% Required	≤30% Not Required ----- >30% Required	Required
Group II	Required	Not Required if saturates ≥ original	≤30% Not Required ----- >30% Required	≤30% Not Required ----- >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.11 For Cummins ISM and ISB tests required for interchanging the base stock, specific requirements are given below.

E.3.2.5.11.1 If only one passing Cummins ISM or ISB test is available on a given technology, Table E-29 applies.

Table E-29—Cummins ISM and ISB Tests Required for Base Oil Interchange

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if: saturates \geq original AND sulfur \leq original	Not Required	$\leq 30\%$ Not Required ----- >30% Required	$\leq 30\%$ Not Required ----- >30% Required	Required
Group II	Required	Not Required if saturates \geq original	$\leq 30\%$ Not Required ----- >30% Required	$\leq 30\%$ Not Required ----- >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.11.2 If more than one passing Cummins ISM or ISB test is available on a given technology, BOI is allowed if the candidate's base oil blend saturates level, sulfur content, and base oil KV@100°C fall within the range of saturates, sulfur, and base oil KV@100°C of the base oil blends in the original passing oils with a minimum of two tested/two passed and the Group III content of the candidate falls within the range of the Group III content covered by the original passing oils.

E.3.2.5.12 For Mack T-12 tests required for interchanging the base stock, specific requirements are given below.

E.3.2.5.12.1 If only one passing Mack T-12 test is available on a given technology, Table E-30 applies.

Table E-30—Mack T-12 Tests Required for Base Oil Interchange

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if: saturates \geq original AND sulfur \leq original AND BOV at 100°C \geq BOV at 100°C of original	Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original	$\leq 30\%$ Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original ----- >30% Required	$\leq 30\%$ Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original ----- >30% Required	Required
Group II	Required	Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original	$\leq 30\%$ Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original ----- >30% Required	$\leq 30\%$ Not Required if: saturates \geq original AND BOV at 100°C \geq BOV at 100°C of original ----- >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.12.2 If more than one passing Mack T-12 test is available on a given technology, BOI is allowed if the proposed interchange oil's base oil blend saturates level, sulfur content, and base oil KV@100°C fall within the range of saturates, sulfur content, and base oil viscosity at 100°C of the base oil blends in the original oils with a minimum of two tested/two passed and the Group III content of the candidate falls within the range of the Group III content covered by the original oils.

E.3.2.5.13 Base Oil Interchange for all Mack T-11 engine tests started after April 28, 2006, may be determined using the method provided in Table E-31 or Table E-32 or Figure E-1. Table E-31, Table E-32, and Figure E-1 all define the minimum saturates content of the candidate oil that can be interchanged from the original test oil.

Table E-31—Mack T-11 BOI Saturates Requirements (within a range)

Tested Oil	Candidate Oil
$X \leq 70.0$	80.0 minimum
$70.0 < X < 95.0$	$(0.6 \cdot X + 38)$ minimum
$X \geq 95.0$	95.0 minimum

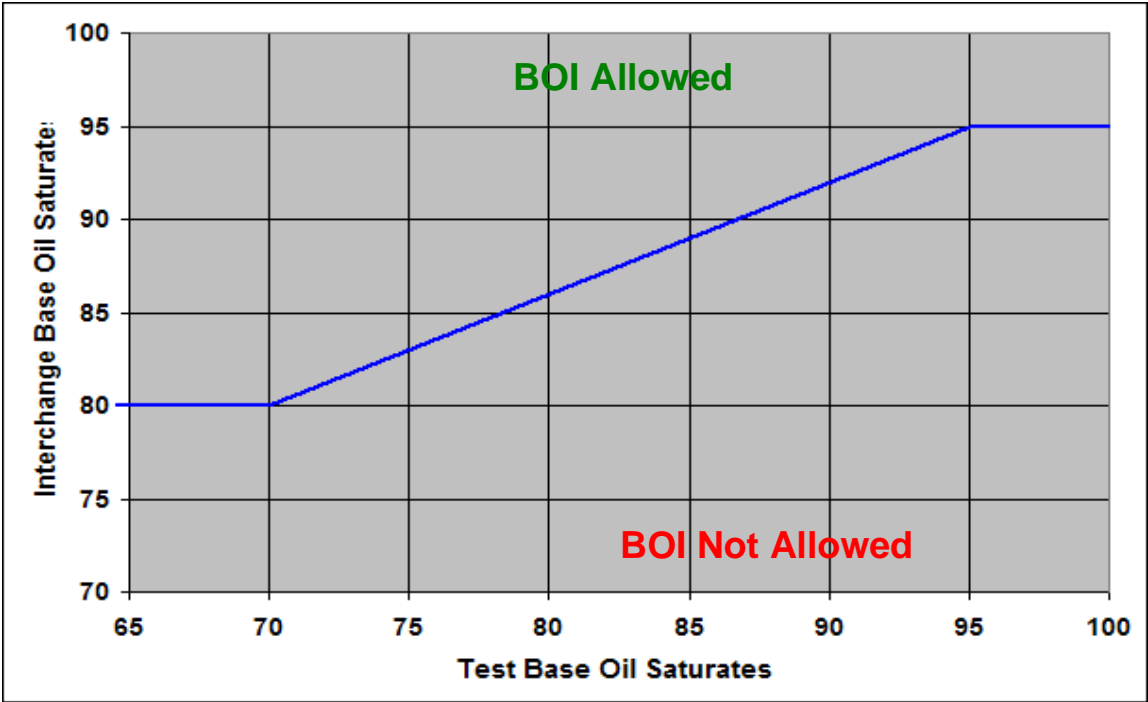


Figure E-1—Mack T-11 BOI Saturates Requirements (according to plot)

Table E-32—Mack T-11 BOI Saturates Requirements (minimum saturates for interchange)

Base Oil Originally Tested for Licensing	Minimum Saturates for Interchange Base Oil
≤70.0	80.0
71.0	80.6
72.0	81.2
73.0	81.8
74.0	82.4
75.0	83.0
76.0	83.6
77.0	84.2
78.0	84.8
79.0	85.4
80.0	86.0
81.0	86.6
82.0	87.2
83.0	87.8
84.0	88.4
85.0	89.0
86.0	89.6
87.0	90.2
88.0	90.8
89.0	91.4
90.0	92.0
91.0	92.6
92.0	93.2
93.0	93.8
94.0	94.4
≥95.0	95.0

E.3.2.5.14 Caterpillar C13 test base oil interchange guidelines within Groups I, II, and III are described in paragraphs E.3.2.5.14.1 and E.3.2.5.14.2 (see notes below). Acceptable test methods for base stock and base oil blend properties are listed in Table E-1. It is understood that when comparing properties, the precision of the methods is taken into consideration.

Notes:

- 1) The typical viscosity index of the Group III in the candidate must be no more than 6 units higher than the typical viscosity index of the Group III in the passing C13 oil with no allowance for test precision.
- 2) PAOs (Group IV) can be interchanged in accordance with item d of E.1.3.
- 3) When Group V base stocks are present, the C13 test must be run.

E.3.2.5.14.1 If only one passing C13 test is available on a given technology and only Group II and/or Group III base stocks are present in the passing C13 oil and the candidate, then C13 BOI is allowed if the viscosity index (VI) of the base oil blend for the candidate oil is equal to or less than the VI of the base oil blend of the passing C13 oil (see note below). If Group I base stock is present in either the passing C13 oil or the candidate, then C13 BOI is allowed if the base oil blend of the candidate has the same saturates level, the same or less sulfur, and the same or lower VI than the base oil blend of the passing C13 oil. Additional guidelines apply when Group III base stock is present in the C13 passing oil:

- a. The candidate oil must have Group III content equal to or less than the passing oil.
- b. The typical viscosity index of the Group III in the candidate must be no more than 6 units higher than the typical viscosity index of the Group III in the passing C13 oil with no allowance for test precision.

Worksheets like the ones shown below can be used to determine if a candidate's properties meet the C13 BOI criteria above. Examples follow that show how the worksheets should be used.

Worksheet 1: If only Group II and/or III in both the candidate and passing oils

	Candidate		Passing Oil
Base oil blend VI		< or =	
Group III content, % in oil		< or =	
Group III VI		See b above	

Example w/worksheet 1: If only Group II and/or III in both the candidate and passing oils

	Candidate		Passing Oil
Base oil blend VI	104	< or =	115
Group III content, % in oil	13.5	< or =	40
Group III VI	126	See b above	126

In the example above, the candidate's properties meet the BOI criteria when compared to the passing oil. BOI is allowed for this candidate.

Worksheet 2: If Group I in either the candidate or passing oils

	Candidate		Passing Oil
Base oil blend sats, %		=	
Base oil blend sulfur, ppm		< or =	
Base oil blend VI		< or =	
Group III content, % in oil		< or =	
Group III VI		See b above	

Example w/worksheet 2: If Group I in either the candidate or passing oils

	Candidate		Passing Oil
Base oil blend sats, %	87	=	87
Base oil blend sulfur, ppm	347 ^a	< or =	320
Base oil blend VI	93	< or =	99
Group III content, % in oil	0	< or =	15
Group III VI	---	See b above	128

^aNeed to apply the precision of the method.

The candidate's properties meet the BOI criteria when compared to the passing oil. In this case, the precision of the sulfur method shows the sulfur contents to be the same (D2622, 320 ppm +/- 41 ppm covers 347 ppm). BOI is allowed for this candidate.

E.3.2.5.14.2 If more than one passing C13 test is available on a given technology, BOI is allowed if the candidate's base oil blend saturates level, sulfur content, and viscosity index fall within the range of saturates level, sulfur, and VI of the base oil blends in the original passing oils (minimum two tested/two passed oils) and the Group III content of the candidate oil falls within the range of Group III content covered by the original passing oils. Additionally, the typical viscosity index of the Group III in the candidate oil must be no more than 6 units higher than the typical viscosity index of the Group III in the passing C13 oil with no allowance for test precision.

A worksheet like the one shown below can be used to determine if a candidate's properties meet the C13 BOI criteria above. Examples follow that show how the worksheets would be used.

Worksheet 3: If more than one passing C13 test is available on a given technology

	Passing Oil 1	Passing Oil 2	Candidate
Base oil blend sats, %			
Base oil blend sulfur, ppm			
Base oil blend VI			
Group III content, % in oil			
Group III VI (See b above)			
Is C13 Required?			Yes or no?
Reason			

Example 1 w/worksheet 3: If more than one passing C13 test is available on a given technology

	Passing Oil 1	Passing Oil 2	Candidate
Base oil blend sats, %	87	96	87

Base oil blend sulfur, ppm	347	0	320
Base oil blend VI	93	115	99
Group III content, % in oil	0	40	15
Group III VI (See b above)	--	126	128
Cat C13	Pass	Pass	
Is C13 Required?			No
Reason			BOI is allowed. Sats, S, VI, and Group III content fall within matrix ranges. Candidate Group III VI is within acceptable +6 range.

Example 2 w/worksheet 3: If more than one passing C13 test is available on a given technology

	Passing Oil 1	Passing Oil 2	Candidate
Base oil blend sats, %	87	96	94
Base oil blend sulfur, ppm	347	0	90
Base oil blend VI	93	115	112
Group III content, % in oil	0	40	20
Group III VI (See b above)	--	126	134
Cat C-13	Pass	Pass	
Is C-13 Required?			Yes
Reason			BOI is not allowed. Base oil sats, S, and VI fall within matrix ranges, but Candidate Group III VI is outside acceptable +6 range.

E.3.2.5.15 If only one passing Volvo T-13 test is available on a given technology, Table E-33 applies.

Table E-33—Volvo T-13 Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided interchange Group IV meets original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.2.5.16 If only one passing Caterpillar Oil Aeration Test (COAT) is available on a given technology, Table E-34 applies.

Table E-34—Caterpillar Oil Aeration Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required provided interchange Group IV meets original manufacturer's specifications in all physical and chemical properties	Required
Group V	Required	Required	Required	Required	Required

E.3.3 EXAMPLES

E.3.3.1 General

The API Base Oil Interchangeability Guidelines must be used in conjunction with the API Guidelines for SAE Viscosity-Grade Engine Testing (see Annex F). When the original approved grade contains less than or equal to 10 percent of the interchange base stock, the higher grade must be tested if it contains greater than 10 percent of the interchange base stock in the formulation.

E.3.3.2 Example 1

In this example, a marketer wants to exchange the 600N base stock in a Group I slate of base stocks for API Service Category CF-4 Heavy Duty engine oils. The marketer has two products involved in this interchange: an SAE 15W-40 grade containing a Group I base oil mix of 50 percent 100N and 50 percent 250N that has been approved by viscosity read-across and testing and an SAE 30 grade containing a Group I base oil mix of 35 percent 250N and 65 percent 600N that has also been approved by viscosity read-across and testing.

The marketer needs to take the following steps:

- Check the API Guidelines for SAE Viscosity-Grade Engine Testing. Some Heavy Duty engine tests can be read across from multigrade to single grade. Others can be read across from single grade to multigrade. Approval testing in original stocks was conducted accordingly.
- Check the API Base Oil Interchangeability Guidelines. Since the SAE 15W-40 product contains none (that is, less than 10 percent of the formulation) of the Group I 600N interchange stock, no testing is required. Additionally, no testing is required for the SAE 30 product when a 600N Group I base stock from another source is used. Group I for Group I interchanges are permitted for CF-4 oils.

E.3.3.3 Example 2

In this example, a marketer wants to change from a Group II slate of base stocks used in a fully approved API CF-4 SAE 15W-40 Heavy Duty engine oil to a Group I slate and also to a mix of Group I and Group II stocks. The approved SAE 15W-40 grade is made with a Group II base oil mix of 65 percent 100N and 35 percent 240N.

The marketer needs to check the Base Oil Interchangeability Guidelines. No further engine testing is required for either interchange.

E.3.3.4 Additional Examples

Additional examples on applying Base Oil Interchangeability Guidelines may be noted in Annex M.

E.3.3.5 Saturates Calculation Example for Table E-20

The following calculation is utilized to determine if a Mack T-8 or T-8E test can be waived when both the originally tested base oil and the intended interchange base oil are below 80 percent saturates. A Mack T-8 or T-8E test is necessary for base oil interchangeability if the new base oil percent saturates level is not greater than or equal to the percent saturates level in the originally tested base oil at the 95 percent confidence level. This calculation is performed as follows:

Difference between two means (Z value calculation, one-sided assuming normal distribution):

$$X_1 - X_2 \geq 1.645 \sqrt{\frac{\sigma_1^2}{n_1} + \frac{\sigma_2^2}{n_2}}$$

where X = mean of saturate determinations

σ = standard deviation of laboratory performing analyses

n = number of determinations

subscripts 1 and 2 refer to the interchange base oil and original base oil respectively

ASTM D 2007 saturates determinations must be made in a laboratory that has a standard deviation of 1.5 or less with an internal reference oil of less than 80 percent saturates.

If the ASTM D 2007 standard deviation for the laboratory in which both the original 70.0 percent saturates base oil and interchange base oil determinations were run is 1.5 and single saturates determinations were made, the Mack T-8 or Mack T-8E test would be waived for all API Group I Base Oils at least 3.48 percent higher in saturates (73.48 percent saturates minimum).

$$\begin{aligned} X_1 - X_2 &\geq 1.645 \sqrt{\frac{(1.5)^2}{1} + \frac{(1.5)^2}{1}} \\ X_1 - X_2 &\geq (1.645)(1.5)\sqrt{2} \\ X_1 - X_2 &\geq 3.48 \end{aligned}$$

If in the above calculation, the ASTM D 2007 laboratory standard deviations were both 0.7 rather than 1.5 and single determinations were made, waiving the Mack T-8 or Mack T-8E Test for all API Group I Base Oils at least 1.63 percent higher (71.63 percent saturates minimum) would be permissible.

E.4 INTERCHANGE FOR BENCH TESTS

E.4.1 GUIDELINES

E.4.1.1 Complete bench testing is required for interchanging a base stock in an API-licensed oil except where noted in the guidelines below.

E.4.2 BENCH TESTS WITH ESTABLISHED INTERCHANGE TESTING GUIDELINES

E.4.2.1 TEOST 33C

E.4.2.1.1 Based on existing TEOST 33 (ASTM D 6335) bench test data submitted to API, the passing TEOST 33 tests specified in Table E-35 are required for interchanging the base stock.

Table E-35—Passing TEOST 33 Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock (Applies to SAE 5W-30 and higher viscosity grades only.)				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	Required	Required	Required
Group II	Not Required	Not Required	Not Required	Required	Required
Group III	Required	Not Required	Not Required	Required	Required
Group IV	Required	Required	Required	Required	Required
Group V	Required	Required	Required	Required	Required

E.4.2.2 TEOST MHT

E.4.2.2.1 Based on existing TEOST MHT (ASTM D 7097) bench test data submitted to API, the passing TEOST MHT tests specified in Table E-36 are required for interchanging the base stock.

Table E-36—TEOST MHT Tests Required for Interchanging the Base Stock

Base Stock in Original Test Oil	Interchange Base Stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur \geq and saturates \leq original	Required	Required	Required	Required
Group II	Not Required	Not Required	Not Required	Required	Required
Group III	Required	Not Required	Required	Required	Required
Group IV	Required	Required	Required	Required	Required
Group V	Required	Required	Required	Required	Required

E.4.2.3 Homogeneity and Miscibility (H&M) ASTM D 6922 and Engine Oil Filterability (EOFT) ASTM D 6795 [formerly known as GM 9099P Filterability (Standard Method)]

E.4.2.3.1 Homogeneity and Miscibility (H&M) ASTM D 6922 and Engine Oil Filterability (EOFT) ASTM D 6795 [formerly known as GM 9099P Filterability (Standard Method)] tests are required in one viscosity grade represented in the core data set. Each base oil interchange requires only one H&M and one EOFT test. (See ACC Code of Practice for definition of core data set.) Core data sets are typically developed in SAE 5W-30, 10W-30, 10W-40 or 15W-40 viscosity grades.

E.4.2.4 Engine Oil Water Tolerance Test (EOWTT) ASTM D 6794

E.4.2.4.1 The Engine Oil Water Tolerance Test (EOWTT) ASTM D 6794 [formerly GM 9099P Filterability (Modified Method for ILSAC GF-2/GF-3)] for each base oil interchange is required only in the viscosity grade with the highest additive (DI/VM) combination.

E.4.2.5 Ball Rust Test (BRT) ASTM D 6557

E.4.2.5.1 If there is one passing Ball Rust Test (BRT) ASTM D 6557 in the core data set as defined by the ACC Code of Practice, read-across is allowed to all other viscosity grades and base oil slates.

E.4.2.6 Mack T-10A or Mack T-12A

E.4.2.6.1 Neither a Mack T-10A nor a Mack T-12A test is required for base oil interchange if the saturates and sulfur content (within the precision of the two analytical tests) of the interchange base oil fall within the range of the saturates and sulfur content of the base oils in the original oils (minimum two oils), and fresh oil MRV-TP1 (ASTM D 4684) @ -20°C of the interchange is equal to or less than the BOI matrix limit.

The BOI matrix limit is defined as:

$$BOI \text{ matrix limit} = 25000 - \text{margin of safety}$$

Margin of safety is defined as:

$$\text{margin of safety} = \text{largest of } Y1 - X1, Y2 - X2, \text{ or } 0$$

where X1 = fresh oil MRV-TP1 @ -20°C for original oil 1

X2 = fresh oil MRV-TP1 @ -20°C for original oil 2

Y1 = MRV-TP1 @ -20°C of 75-hour T-10A or T-12A sample for original oil 1

Y2 = MRV-TP1 @ -20°C of 75-hour T-10A or T-12A sample for original oil 2

An example of this guideline's application is provided in Table E-37.

Table E-37—Example of T-10A or T-12A BOI Guideline Application^a

	Matrix Oil 1	Matrix Oil 2	Candidate Oil A	Candidate Oil B	Candidate Oil C
Base Oil Saturates, mass%	99	65	70	80	75
Base Oil Sulfur, mass%	<0.002	0.7	0.5	0.3	0.8
Is base oil saturates within the matrix range (within the precision of the test)?			Yes	Yes	Yes
Is base oil sulfur within the matrix range (within the precision of the test)?			Yes	Yes	No
Fresh Oil MRV-TP1 @ -20°C, cP	12000	15000	16000	20000	Immaterial
T-10A or T-12A MRV-TP1 @ -20°C, cP	18000	16000			
Yield stress, Pa	0	0			
Margin of safety	Largest of (18000–12000) or (16000–15000) or 0 = 6000				
BOI matrix limit	25000–6000 = 19000		19000	19000	19000
Test Required?			No	Yes	Yes
Reason			Fresh oil MRV-TP1 less than BOI matrix limit	Fresh oil MRV-TP1 greater than BOI matrix limit	Base oil sulfur not in matrix range

^a T-10A = Mack T-10A engine test; T-12A = Mack T-12A engine test.

E.4.2.7 The Diesel Elastomer Compatibility Test (ASTM D7216 Annex A1)²

E.4.2.7.1 The Diesel Elastomer Compatibility Test (ASTM D7216 Annex A1) is not required if the saturates and sulfur content (within the precision of the tests) of the interchange base oil fall within the range of the saturates and sulfur content of the base oils in the original candidate oils (minimum two candidate oils) and the DI package is unchanged. An example of this guideline's application is provided in Table E-38.

Table E-38—The Diesel Elastomer Compatibility Test (ASTM D7216 Annex A1) BOI Guideline Application

	Matrix Oil 1	Matrix Oil 2	Candidate Oil A	Candidate Oil B
Base Oil Saturates, mass %	99	65	70	80
Base Oil Sulfur, mass %	<0.002	0.7	0.5	0.3
CI-4 Elastomer Compatibility Test	Pass	Pass		
Test Required?			No	No
Reason			Base oil saturates and sulfur fall within matrix ranges	Base oil saturates and sulfur fall within matrix ranges

E.4.2.8 Mack T-11A

E.4.2.8.1 In addition to the Mack T-11 BOI guidelines being met, for Base Oil Interchange in the Mack T-11A the fresh oil MRV-TP1 (ASTM D 4684) @ -20°C of the interchange candidate must be less than or equal to 20000 cP with no yield stress.

E.4.2.9 High-Temperature Corrosion Bench Test (HTCBT) ASTM D 6594

E.4.2.9.1 If there is one passing High-Temperature Corrosion Bench Test (HTCBT) ASTM D 6594 in the core data set as defined by the ACC Code of Practice, read-across is allowed to all other viscosity grades and base oil slates.

E.4.2.10 Emulsion Retention ASTM D7563

E.4.2.10.1 For oils formulated with Group II and/or Group III base stocks, the Emulsion Retention ASTM D7563 is required only for the highest additive (DI/VM) concentration. Read across is allowed to all other Group II, Group III and combinations of Group II and Group III base oil/viscosity grade formulations using the same or lower concentration of the identical additive (DI/VM) combination. If the PPD type is changed for the DI/VI combination, testing is required.

E.4.2.11 PCMO Elastomer Compatibility Test (ASTM D7216 Annex A)²

E.4.2.12 A passing PCMO Elastomer Compatibility Test (ASTM D7216 Annex A) in the core data set (as defined in the ACC Code) run in Group II or Group III or a mix of Group II and Group III, can be read across to formulations using other Group II or Group III or a mix of Group II and Group III base stocks.

E.4.2.13 Additionally, there is no viscosity grade restriction if the read across is limited to 0W-20, 0W-30, 5W-20, 5W-30, 10W-30 and 10W-40 viscosity grades.

E.4.2.14 When reading to a candidate using Group I base stocks, the PCMO Elastomer Compatibility Test (ASTM D7216 Annex A2) is not required if the base oil saturates and base oil sulfur content (within the precision of the tests) of the interchange base oil fall within the range of the base oil saturates and base oil sulfur content of the base oils in the original candidate oils (minimum two candidate oils) and the DI package is unchanged. An example of this guideline's application is provided in Table E-39.

² Modified per ballot 5106

Table E-39– Example of PCMO Elastomer Compatibility Test Including API Group I Base Stocks

	Matrix Oil 1	Matrix Oil 2	Candidate Oil A	Candidate Oil B
Base Oil Saturates, mass %	85	99	92	96
Base Oil Sulfur, mass %	0.2	0.0	0.17	0.01
GF-5 Elastomer Compatibility Test	Pass	Pass		
Test Required?			No	No
Reason			Base oil sulfur and Base oil VI falls within matrix ranges	Base oil sulfur and Base oil VI falls within matrix ranges